

A Game Theory Framework for a Distributed and Energy Efficient Bandwidth Expansion Process

Rodrigo A. Vaca Ramírez⁽¹⁾, John S. Thompson⁽¹⁾, Eitan Altman⁽²⁾, and Víctor M. Ramos R.⁽³⁾

⁽¹⁾*The University of Edinburgh, Institute for Digital Communications*

King's Buildings, Mayfield Road, Edinburgh, EH9 3JL, UK

⁽²⁾*INRIA, Sophia Antipolis Cedex, BP93, 06902 France*

⁽³⁾*Universidad Autónoma Metropolitana (UAM)*

Department of Electrical Engineering Iztapalapa, Mexico City

E-Mail: {r.vaca, john.thompson}@ed.ac.uk, eitan.altman@inria.fr, vicman@xanum.uam.mx

Invited Paper

Abstract—In this paper, we aim to reduce the power expenditure in the reverse link during low network load periods, by allocating extra resource blocks (RBs) to the mobile users. Thereby, the user's rate demands are split among its allocated RBs in order to transmit in each of them by using a low level modulation order. We model the bandwidth expansion (BE) process by a game theory framework derived from the concept of stable marriage with incomplete lists (SMI). We focus on the optimization of the circuit consumed power rather than on the transmitted power. Thus, the power consumption of the radio frequency (RF) circuits and the baseband (BB) system module is taken into account. Our proposed framework works in a distributed way, hence each RB and mobile user in the system are considered as an independent entity which takes an active role in the decision making process. Additionally, we show that when circuit power consumption is used as an optimization metric, transmitting in more than one RB may not become an energy efficient solution for users experiencing favorable propagation conditions in the reverse link.

I. INTRODUCTION

Wireless cellular communication systems have experienced a rapid development in recent years. This is due to the tenfold increase of data volume every five years which comes together with a doubling in energy consumption over the same period. Thus, academia and industry researchers have started to consider solutions to reduce the energy expenditure rather than only improving system's capacity.

Significant research has been performed in the context of green radio. In [1], the authors describe the most promising research directions to improve energy efficiency in wireless networks. Radio resource management techniques such as: interference mitigation and resource block (RB) allocation are proposed as an efficient way to reduce power consumption in communication systems. In [2], we propose a scheme for intercell interference reduction which trades capacity for energy efficiency. Capacity is reduced for users at the cell center which consequently reduces interference for users close to the cell edge. Thus, significant gains in energy efficiency can be obtained with a minimal reduction in system's throughput. An energy efficient RB allocation scheme, which is coordinated at the base station (BS) side is proposed in [3]. The authors

show that by allocating extra RBs to the mobile users it is possible to reduce the transmitted power expenditure in the downlink while maintaining a constant data rate. In addition, they demonstrate that increasing the number of allocated RBs always provides an increase in the energy efficiency metric for the system. Nevertheless, their approach is only based in optimizing the transmitted power, hence the power expenditure of power amplifiers and the signal processing module is ignored.

The design and implementation of centralized approaches such as the one proposed in [3] may become an ambitious task due to the large scale nature of wireless systems [4]. This is because the complexity and implementation cost of centralized schemes tend to be a limiting factor in the network performance [2]. In [4], the authors use the game theory concept of Nash bargaining, in order to effectively assign sub-carriers to mobile users in a single cell scenario. They aim to maximize the overall system rate under power and rate constraints for each user. Moreover, they show that by using game theory, the system's complexity may be reduced while obtaining a similar performance to the centralized schemes.

Our main contribution in this paper is to model an energy efficient RB allocation process by using a low complexity distributed approach derived from the concept of stable marriage with incomplete lists (SMI) [5]. We focus on the optimization of the circuit consumed power rather than the transmitted power. In addition, we show that adding extra RBs results in a more energy efficient solution for users close to cell edge than for users close to the cell center. The remainder of this paper is as follows, in Section II we present the problem scenario and performance metrics. An analysis of the consequences of the proposed bandwidth expansion method in terms of energy efficiency are discussed in Section III. In Section IV, we describe our bandwidth expansion framework. A summary of the comparison schemes and the simulation scenario are described in Section V. Results are presented in Section VI. Finally, Section VII offers concluding remarks.

II. SYSTEM SCENARIO AND PERFORMANCE METRICS

We consider K single antenna mobile stations (MSs) sending data on the uplink to a multiple antenna base station (BS). The system bandwidth B (Hz) is divided into R resource blocks (RBs). Hence, an orthogonal frequency division multiple access (OFDMA) system is constructed. When the network is fully loaded, a single RB is assigned to each mobile user. However, during low load periods spare RBs are available, thus our proposed bandwidth expansion mechanism may be applied by allocating extra RBs to each mobile user.

A. Channel Model

1) *Reverse Link*: As mentioned above, the frequency selective channel is decomposed into R RBs. Thus, the uplink received signal at the base station (BS) separated by a distance d from a k -th MS is determined by path loss, log-normal shadowing, and channel variations caused by frequency selective fading. The channel exhibits Rayleigh fading, whose power delay profile has been taken from [6]. Path loss and shadowing are modeled as a power fall off that subsequently attenuates the power of the transmitted signal. Thus, the average power of the received signal on the r -th RB can be expressed by [2]:

$$Pr_k^r = Pt_k^r 10^{\frac{-L(d_k) + X_{\sigma_k}}{10}}, \quad (1)$$

where Pt_k^r denotes the signal transmitted power for the k -th user in the r -th RB, X_{σ_k} is the k -th user log-normal shadowing value (dB) with standard deviation σ , and $L(d_k)$ is the distance-dependent path loss (dB), which is calculated as follows:

$$L(d_k) = 15.3 + 37.6 \log_{10}(d_k). \quad (2)$$

We assume the channel is known at the transmitter and receiver. Therefore, the received signal at the BS side on the r -th RB for the k -th user is given by:

$$\mathbf{y}_k^r = \sqrt{Pr_k^r} \mathbf{h}_k^r s_k^r + \mathbf{n}_k^r, \quad (3)$$

where \mathbf{h}_k^r is the $1 \times M_r$ channel matrix on the r -th RB, s_k^r is the information symbol with unit energy, and \mathbf{n}_k^r is the $M_r \times 1$ noise factor. Hence, the received signal to noise ratio (SNR) at the BS side in the r -th RB may be expressed by [7]:

$$\eta_k^r = \frac{\|\mathbf{h}_k^r\|_F^2 Pr_k^r}{\rho}, \quad (4)$$

where ρ is the noise power. In addition, by combining Eqs. (1), and (4) and by defining $G_k^r = \|\mathbf{h}_k^r\|_F^2 10^{\frac{-L(d_k) + X_{\sigma_k}}{10}}$, Eq. (4) may be written as follows:

$$\eta_k^r = \frac{Pt_k^r G_k^r}{\rho}, \quad (5)$$

where G_k^r represents the channel path-gain between the BS and the k -th MS in the r -th RB.

B. Power Consumption Model

In this work, we take into account the circuit power expenditure caused by information transmission in the uplink. The uplink power expenditure mainly depends on components such as the baseband (BB) module and the radio frequency (RF) module. The former encloses the power expenditure due to the baseband signal processing (e.g., channel coding and decoding), and the latter includes the power consumption of the radio frequency parts (e.g., the power amplifier). Therefore, to model the power consumption of both modules, we use the model proposed in [8], where an analysis of the power consumption for both modules in a Long Term Evolution (LTE) MS is presented.

In order to model the circuit consumed power of the RF module a power amplifier array is assumed [8,9]. The power amplifier array is built based on a 10 [dBm] low power amplifier (LPA) and two high power amplifiers (HPA); HPA 1, and HPA 2, where the power amplifier efficiency is assumed equal for both high power amplifiers. However, HPA 2 is designed to transmit at 20 [dBm], which is half of the maximum transmitted power of HPA 1. Therefore, the circuit power consumption in the uplink $P_k^r(Pt_k^{r*})$ [W] may be represented as follows.

$$P_k^r(Pt_k^{r*}) = \begin{cases} 2 + 0.005(Pt_k^{r*}) - A & 10 \geq Pt_k^{r*} \\ \frac{1.2 + 0.12(Pt_k^{r*}) - (A - P_{BB})}{2} & 20 \geq Pt_k^{r*} > 10 \\ 1.2 + 0.12(Pt_k^{r*}) - A & 23 \geq Pt_k^{r*} > 20, \end{cases} \quad (6)$$

where the Pt_k^{r*} is the transmitted power value Pt_k^r in [dBm], and A comprises a set of constant values defined by [8]:

$$A = P_{Tx} + P_{con} - P_{BB} [W], \quad (7)$$

where P_{Tx} is the base power that the RF chain consumes in transmission mode, P_{con} is the MS's power consumption when connected to the BS, and P_{BB} is the power consumed by the BB module [8].

C. Performance Metrics

The throughput between the k -th MS and the BS in the r -th RB using adaptive modulation and coding is computed by [2]:

$$T_k^r(\eta_k^r) = k_{sc} \rho_s \varepsilon(\eta_k^r) [\text{bits/s}], \quad (8)$$

where k_{sc} is the number of subcarriers per resource block, ρ_s is the symbol rate per subcarrier, and $\varepsilon(\eta_k^r)$ is the spectral efficiency for a Long Term Evolution (LTE) system [2].

Moreover, the total user throughput for the k -th user can be obtained by:

$$T_k = \sum_{r \in Z} T_k^r [\text{bits/s}], \quad (9)$$

where $Z \in R$ represents the subset of RBs allocated to the k -th MS, whose cardinality defines the bandwidth expansion factor

given by $|Z|$. Additionally, the total user circuit consumed power for the k -th MS is represented by:

$$P_{\text{total}_k} = \sum_{r \in Z} P_k^r(Pt_k^{r*}) \quad [W]. \quad (10)$$

The user energy efficiency β_k measures the user throughput per unit of circuit consumed power:

$$\beta_k = T_k / P_{\text{total}_k} \quad [\text{bits/J}]. \quad (11)$$

Furthermore, the system energy efficiency β_{sys} describes the correspondence between the total user throughput and the total circuit power spent by all the users in the system.

$$\beta_{sys} = \sum_{k=1}^K T_k / \sum_{k=1}^K P_{\text{total}_k} \quad [\text{bits/J}], \quad (12)$$

where K is the number of total users in the system.

III. THEORETICAL ANALYSIS

In order to show the improvements in energy efficiency, Shannon's capacity formula will be used for ease of analysis and without loss of generality. Thereby, the capacity in the r -th RB may be written as follows:

$$C_k^r = B \log_2(1 + \eta_k^r), \quad (13)$$

where B represents the r -th's RB bandwidth. Moreover, assume that for the bandwidth expansion (BE) scheme, we aim to have the same overall transmission rate after more RBs are allocated to the k -th user. This requirement may be represented by:

$$|Z|(B \log_2(1 + \eta_{k_BE}^r)) = B \log_2(1 + \eta_k^r), \quad (14)$$

where $\eta_{k_BE}^r$ is the SNR of the k -th user in the r -th RB when the bandwidth expansion scheme is used. Recall that in an OFDMA system all the operations are always performed on an RB basis. Hence, by algebraic manipulations (14) becomes:

$$(1 + \eta_{k_BE}^r)^{|Z|} = 1 + \eta_k^r, \quad (15)$$

By combining Eqs. (5) and (15), we may obtain the transmit power expenditure due to the BE scheme [3].

$$Pt_{k_BE} = \frac{\rho}{G_{k_BE}^r} \left((1 + \eta_k^r)^{1/|Z|} - 1 \right), \quad (16)$$

The required transmitted power due to different values of $|Z|$ is plotted in Fig. 1. The ratio $\frac{\rho}{G_{k_BE}^r}$ is taken as constant value, under the assumption that the noise that an RB experiences is not directly affected by allocating extra RBs, since all operations are performed on a per RB basis. Moreover, to improve system performance, the propagation conditions (e.g., frequency selective fading) of the new allocated RBs should be similar or better than the current allocated RB as we will show later in the paper.

In Fig. 1, we can see that increasing the number of RBs always provides transmission power savings at different SNR values, since a significant decrease in transmission power is observed as the value of $|Z|$ increases. Nevertheless, in Fig. 2 it can be seen that this behavior does not remain the same

when circuit power consumption is considered by including the model in (6). Adding extra RBs is not an energy efficient solution at low SNR levels (e.g., $\text{SNR} \leq 6$ [dB]). Therefore, transmitting with only one RB is the most energy efficient solution in this regime. This is because in a low SNR regime a low required transmitted power is also required. Thus, using the BB and the RF modules to transmit in more than one RB is not an energy efficient solution. Moreover, we can see that $|Z| = 2$ tends to be the most energy efficient solution from 6 to 15 [dB]. Finally, using more than two RBs provides the most power savings for high SNR levels (e.g., $\text{SNR} \geq 15$ [dB]). This is because in a high SNR regime a high transmitted power is also required. Hence, the circuit power consumption for using the RF and the BB to transmit in multiple RBs is justified in this case.

Moreover, when channel effects are considered, it should be understood when it is worthwhile to add extra RBs to a specific user, since channel propagation conditions such as frequency selective fading may not remain the same within different RBs. Hence, in terms of transmitted power this requirement can be represented by [3]:

$$Pt_k^r \geq \sum_{r \in Z} Pt_{k_BE}^r. \quad (17)$$

In terms of circuit consumed power, Eq. (17) becomes:

$$P_k^r(Pt_k^{r*}) \geq \sum_{r \in Z} P_{k_BE}^r(Pt_{k_BE}^{r*}). \quad (18)$$

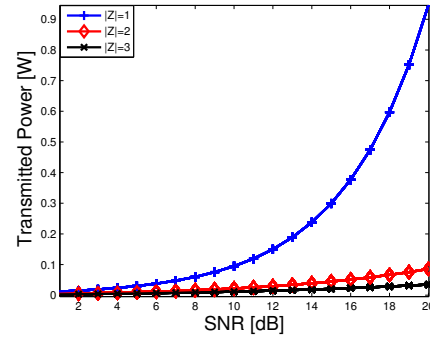


Fig. 1. Transmitted power.

IV. DISTRIBUTED BANDWIDTH EXPANSION FRAMEWORK

In order to obtain energy savings, we model the bandwidth expansion process by a game theoretic approach derived from the concept of stable marriage with incomplete lists (SMI) [5]. The SMI framework is used to find a *stable match* between two sets (MSs and RBs). A match is said to be *stable* when no better alternative pairing exists in the other set compared with the currently matched elements. Thereby, the SMI reaches a *stable* solution for the BE process [5].

In our proposed framework, the set of spare RBs in the system consists of F RBs, thus $F \in R$ and the other set represents the K mobile stations. Moreover, in order to

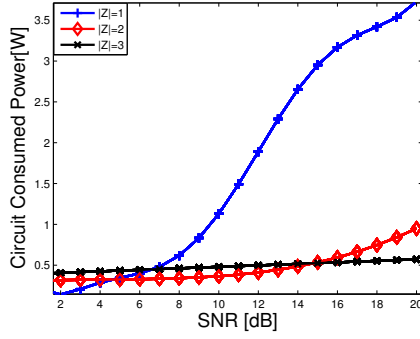


Fig. 2. Circuit power consumption.

perform the bandwidth expansion process every element in each set should build a list which consists of the members of the opposite set ordered by *preference*. A matching pair M is a tuple (MS, RB) such that each MS and f -th spare RB belong exactly to one tuple. If $(k, f) \in M$, we say that the f -th spare RB is the k -th MS's partner in M and vice versa. The distributed BE procedure is modeled as follows:

1) First, the channel quality information is obtained at the BS side by Sounding Reference Signals (SRS) transmitted by the MS [10].

2) Further, this information may be forwarded to the MSs through the feedback channel. Thereby, MSs are able to compute the benefit of using the BE method with each of the spare RBs in the F subset by Eq. (18).

$$U_{kf} = P_k^r(Pt_k^{r*}) - \sum_{j \in Z} P_{k_BE}^j(Pt_{k_BE}^{j*}), \quad (19)$$

where the Z subset comprises the currently allocated r -th RB to the k -th MS and the f -th spare RB. Thus, Eq. (19) represents the difference in power expenditure when using the currently allocated r -th RB compared with the BE method. Hence, the higher the utility value, the more willing is the k -th MS to use more than one RB for transmission. Moreover, if the utility becomes negative the MS will avoid using the spare RB contained in the Z subset, since the power consumption in the uplink increases when the BE is used. Furthermore, the MS preference list L_k is formed by evaluating the elements of the subset F with Eq. (19). MSs not obtaining any benefit from using the BE method with any of the spare RBs in the subset, F , should transmit in a single RB.

3) In addition, the RBs in the F subset need to compute the suitability for the BE process with a specific MS. Thus, each RB ranks the available MSs in the network as follows:

$$U_{fk} = \sum_{j=1, j \neq k}^N \mathbb{1} P_k^f(Pt_k^{f*}) \leq P_j^f(Pt_j^{f*}), \quad (20)$$

where U_{fk} is an utility function which consists of the pairwise comparisons of the f -th RB when allocated to the k -th MS against any other j -th MS in the network, where $j \in K$. The operator $\mathbb{1} A \leq B$ provides an output of 1 when the proposed condition holds, and 0 in any other case. Thus, a high utility

Initialization: All MSs use a single RB for transmission;
while There is a spare RB willing to get into the BE with the k -th MS;

do

MS_h is the highest MS in the f -th spare RB preference list, L_f , to whom it has not yet proposed;
if MS_h is free **then**
 the f -th spare RB and MS_h become engaged;
else
 MS_h is already engaged with a j -th spare RB (where $j \neq f$);
 if MS_h prefers the f -th spare RB to the j -th spare RB in its preference list, L_k ; **then**
 the f -th spare RB becomes engaged, and the j -th spare RB becomes free;
 else
 MS_h remains engaged to the f -th spare RB;
 MS_h is deleted from the list of the f -th spare RB, L_f ;
end
end

Algorithm 1: Stable Marriage with incomplete lists (SMI).

value means that allocating the f -th RB to the k -th MS will contribute to higher energy savings in the system. Moreover, the RB's preference list, L_f , is formed by evaluating each k -th MS with Equation (20).

4) After the ranking is done, the SMI procedure given in Algorithm (1), can be applied.

V. COMPARISON SCHEMES AND SIMULATION SCENARIO

To evaluate the performance of our algorithm, we describe in this section three BE schemes which can allocate extra RBs to reduce the power expenditure in the reverse link. In addition, we implement a baseline scheme where all the MSs transmit in a single RB.

A. Arbitrary RB allocation (ARBA)

In this scheme, the extra RBs used by the k -th MS for transmission in the reverse link are chosen on a random basis.

B. Stable marriage

By using Algorithm (1), the BE expansion process through stable marriage can be applied to increase the energy efficiency in the network.

C. Centralized global optimum

A centralized global optimum approach, which is based on an exhaustive search coordinated from the BS side, is implemented in order to find the price of anarchy for our proposed method. The price of anarchy is computed as the difference in performance when comparing a distributed with a centralized method.

TABLE I
SIMULATION PARAMETERS.

Parameter	Value
MSs per macro-cell, K	20
Number of antennas at the receiver, M_r	5
Cell radius	150m
Number of available RBs, R	45
Number of cells, D	1
Subcarriers per RB, k_{sc}	12
Symbol rate per subcarrier, ϱ_s	15ksps
P_{Tx}	31.8dBm
P_{con}	23.8dBm
P_{BB} for $\varepsilon = 4.523 \frac{\text{bits}}{\text{symbol}}$	11.9dBm
Maximum user transmit power	23dBm
Shadowing, Std. Dev., σ	3dB
Target SNR,	14dB
ε for 14dB SNR	$3.90 \frac{\text{bits}}{\text{symbol}}$
BE factor, $ Z $	2

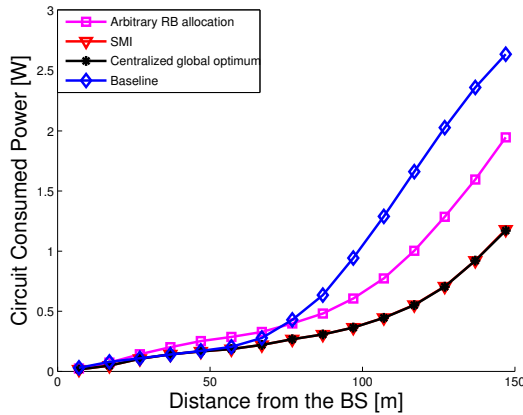


Fig. 3. User circuit consumed power vs distance from the BS.

D. Simulation scenario

Monte Carlo simulations are performed using the parameters listed in Table I. This allows comparison of the performance of our method with the other schemes presented above. The simulation is comprised of a single cell with the MSs uniformly distributed over the cell. The cell is served by an omnidirectional BS. Furthermore, the system is thermal noise limited. We assume low network load conditions (e.g., 40% to 60% of the maximum capacity) thus spare RBs are available in the network. In our simulation, we assume that all the users in the network should achieve the same target SNR in order to have fair comparisons.

VI. RESULTS

In this section, we compare the performance in terms of energy efficiency and circuit power expenditure for the schemes presented in the last section. In Fig. 3, we plot the circuit power expenditure against different distances from the BS. We can observe that when MSs are close to the cell center, the user's power consumption of the centralized global optimum and SMI schemes overlap with the baseline method. This is because mobile users are able to experience more favorable propagation conditions when they are close to the

cell center. Thus, as shown in Section III the generated power cost due to the BB and RF modules when transmitting with more than one RB does not become an optimal solution in a low power transmission regime. Moreover, since the SMI scheme performance is based on optimizing the utility function, Eq. (19), it allows our proposed algorithm to use more than one RB only when it generates significant power savings. In the case of the arbitrary RB allocation (ARBA) scheme, we can see how at close distances from the BS, this method consumes more power to achieve the same rate constraints than other approaches. This difference in performance is because, ARBA may allocate more than one RB when transmitting at close distances from the BS. Furthermore, for users close to the cell edge (e.g., 140 m), we can observe that less power is required when more than one RB are allocated to them. This can be seen, since the other presented methods require less circuit consumed power than the baseline. Thus, it can be understood that in order to reduce energy consumption in the system, the extra RBs should be allocated mostly for users close to the edge rather than for cell center users.

Additionally, in Fig. 4 we show the system energy efficiency. At the 50th percentile, the SMI and the centralized method show performance improvements of 115% and 72% when compared to the baseline and ARBA, respectively. Hence, the proposed SMI approach is more energy efficient than the other two approaches. Such gains in energy efficiency for the SMI and the centralized method compared to the other approaches are because both schemes allocate efficiently most of the RBs at the cell edge rather than at the cell center. Furthermore, notice that the performance of the centralized optimum method is the same as for the SMI scheme. Thus, for this case the price of anarchy of the proposed approach is zero.

To conclude our comparison, we discuss the computational complexity of the SMI and the centralized approach. It can be seen that the SMI method bases its optimization on Eqs (19) and (20), which induces a complexity of $|F|$ and K respectively, where $|\cdot|$ defines the cardinality of the subset.

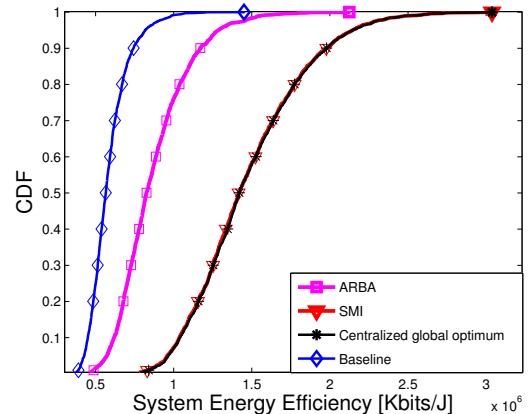


Fig. 4. System CDF energy efficiency.

Furthermore, the bandwidth expansion scheme is based on the assumption of having more RBs available than MSs present in the system, thus the complexity of the algorithm is bounded by the number of RBs rather than by the number of MSs. So, the complexity induced by the computation of the utility functions is $|F|$. Moreover, forming the preference lists L_k and L_f and performing Algorithm (1) requires a sorting and a binary search operation respectively, thus a complexity of $|F|\log(|F|)$ and a complexity of $\log(|F|)$ is induced for each calculation. The dominant factor will be the one with the largest exponent, therefore the complexity of SMI is upper bounded by $|F|\log(|F|)$. The complexity increases linearly with the number of MSs, K , in the system. Hence by using order \mathcal{O} notation, the complexity of the SMI is denoted by $\mathcal{O}(K \times |F|\log(|F|))$. In the case of the centralized method, an exhaustive search approach, where the number of elements is discrete, is considered \mathcal{NP} -complete [11]. The optimal solution between the spare set of RBs, F , and the K MSs is computed through permutations between both sets in order to find the match which provides the optimal energy efficient solution for the system. After all the permutations are done, the system chooses the most optimal solution. The total number of permutations is upper bounded by the number of spare RBs, F . Thus, the number of required permutations in the system is $|F|!$. The circuit power that is consumed when using the BE is obtained considering the right-hand side of Eq (18). Thus, an arithmetic operation is required which induces a complexity of $|F|!$ for the method. Thereby, the final complexity for the centralized scheme is $\mathcal{O}(|F|!)$. By using the values provided in Table I, we get $|F| = 25$. Therefore, the SMI has a complexity of 1609 compared to a complexity of $1.55e^{25}$ for the centralized scheme.

VII. CONCLUSIONS

In this work, we proposed a low complexity distributed algorithm for bandwidth expansion derived from the SMI concept. In the proposed approach each RB and mobile user in the system are considered as an independent entity which takes an active role in the decision making process. From the results obtained, we showed that our approach is a more energy efficient solution with improvements of 115% and 72% when compared to the baseline and the ARBA scheme

respectively. The performance of our method is the same in bits per Joule as the centralized global optimum, thus the price of anarchy in this case is zero. Furthermore, we have shown analytically and by simulation that when the mobile user experience favorable propagation conditions in the reverse link, the circuit consumed power is reduced by transmitting in one RB rather than using an RB expansion technique.

ACKNOWLEDGEMENTS

The work of Eitan Altman has been partially supported by the European Commission within the framework of the CONGAS project FP7-ICT-2011-8-317672.

REFERENCES

- [1] C. Han, T. Harrold, S. Armour, I. Krikidis, S. Videv, P. M. Grant, H. Haas, J. Thompson, I. Ku, C.-X. Wang, T. A. Le, M. Nakhai, J. Zhang, and L. Hanzo, "Green radio: radio techniques to enable energy-efficient wireless networks," *IEEE Communications Magazine*, vol. 49, no. 6, pp. 46–54, 2011.
- [2] R. Vaca, J. Thompson, and V. Ramos, "Non-cooperative uplink interference protection framework for fair and energy efficient Orthogonal Frequency Division Multiple Access networks," *IET Communications*, vol. 7, no. 18, pp. 2015–2025, 2013.
- [3] S. Videv and H. Haas, "Energy-efficient scheduling and bandwidth-energy efficiency trade-off with low load," in *IEEE International Conference on Communications (ICC)*, 2011, pp. 1–5.
- [4] Z. Han and R. Liu, "Fair multiuser channel allocation for OFDMA networks using Nash bargaining solutions and coalitions," *IEEE Transactions on Communications*, vol. 53, no. 8, pp. 1366–1376, 2005.
- [5] K. Iwama, , and S. Miyazaki, "A survey of the stable marriage problem and its variants," in *Proceedings of the International Conference on Informatics Research for Development of Knowledge Society Infrastructure*, Jan 2008, pp. 131–136.
- [6] A. Lozano and N. Jindal, "Transmit diversity vs. spatial multiplexing in modern MIMO systems," *IEEE Transactions on Wireless Communications*, vol. 9, no. 1, pp. 186–197, 2010.
- [7] A. Paulraj, R. Nabar, and D. Gore, *Introduction to space-time wireless communications*, C. U. Press, Ed. Cambridge University Press, Jul. 2003.
- [8] A. Jensen, M. Lauridsen, P. Mogensen, T. Srensen, and P. Jensen, "LTE UE power consumption model for system level energy and performance optimization," in *Proceedings of the IEEE 76th Vehicular Technology Conference*, Sep. 2012, pp. 1–6.
- [9] K. Bobae, K. Cholho, and L. Jongsoo, "A dual-mode power amplifier with on-chip switch bias control circuits for LTE handsets," *IEEE Transactions on Circuits and Systems*, vol. 58, no. 12, pp. 857–861, 2011.
- [10] S. Sesia, I. Toufik, and M. Bake, *LTE-The UMTS Long Term Evolution From Theory to Practice*, 1st ed., C. Wiley, Ed. Wiley, Chichester, 2009.
- [11] Z. Han and K. J. R. Liu, *Resource Allocation for Wireless Networks*, C. U. Press, Ed. Cambridge University Press, Jul. 2008.